


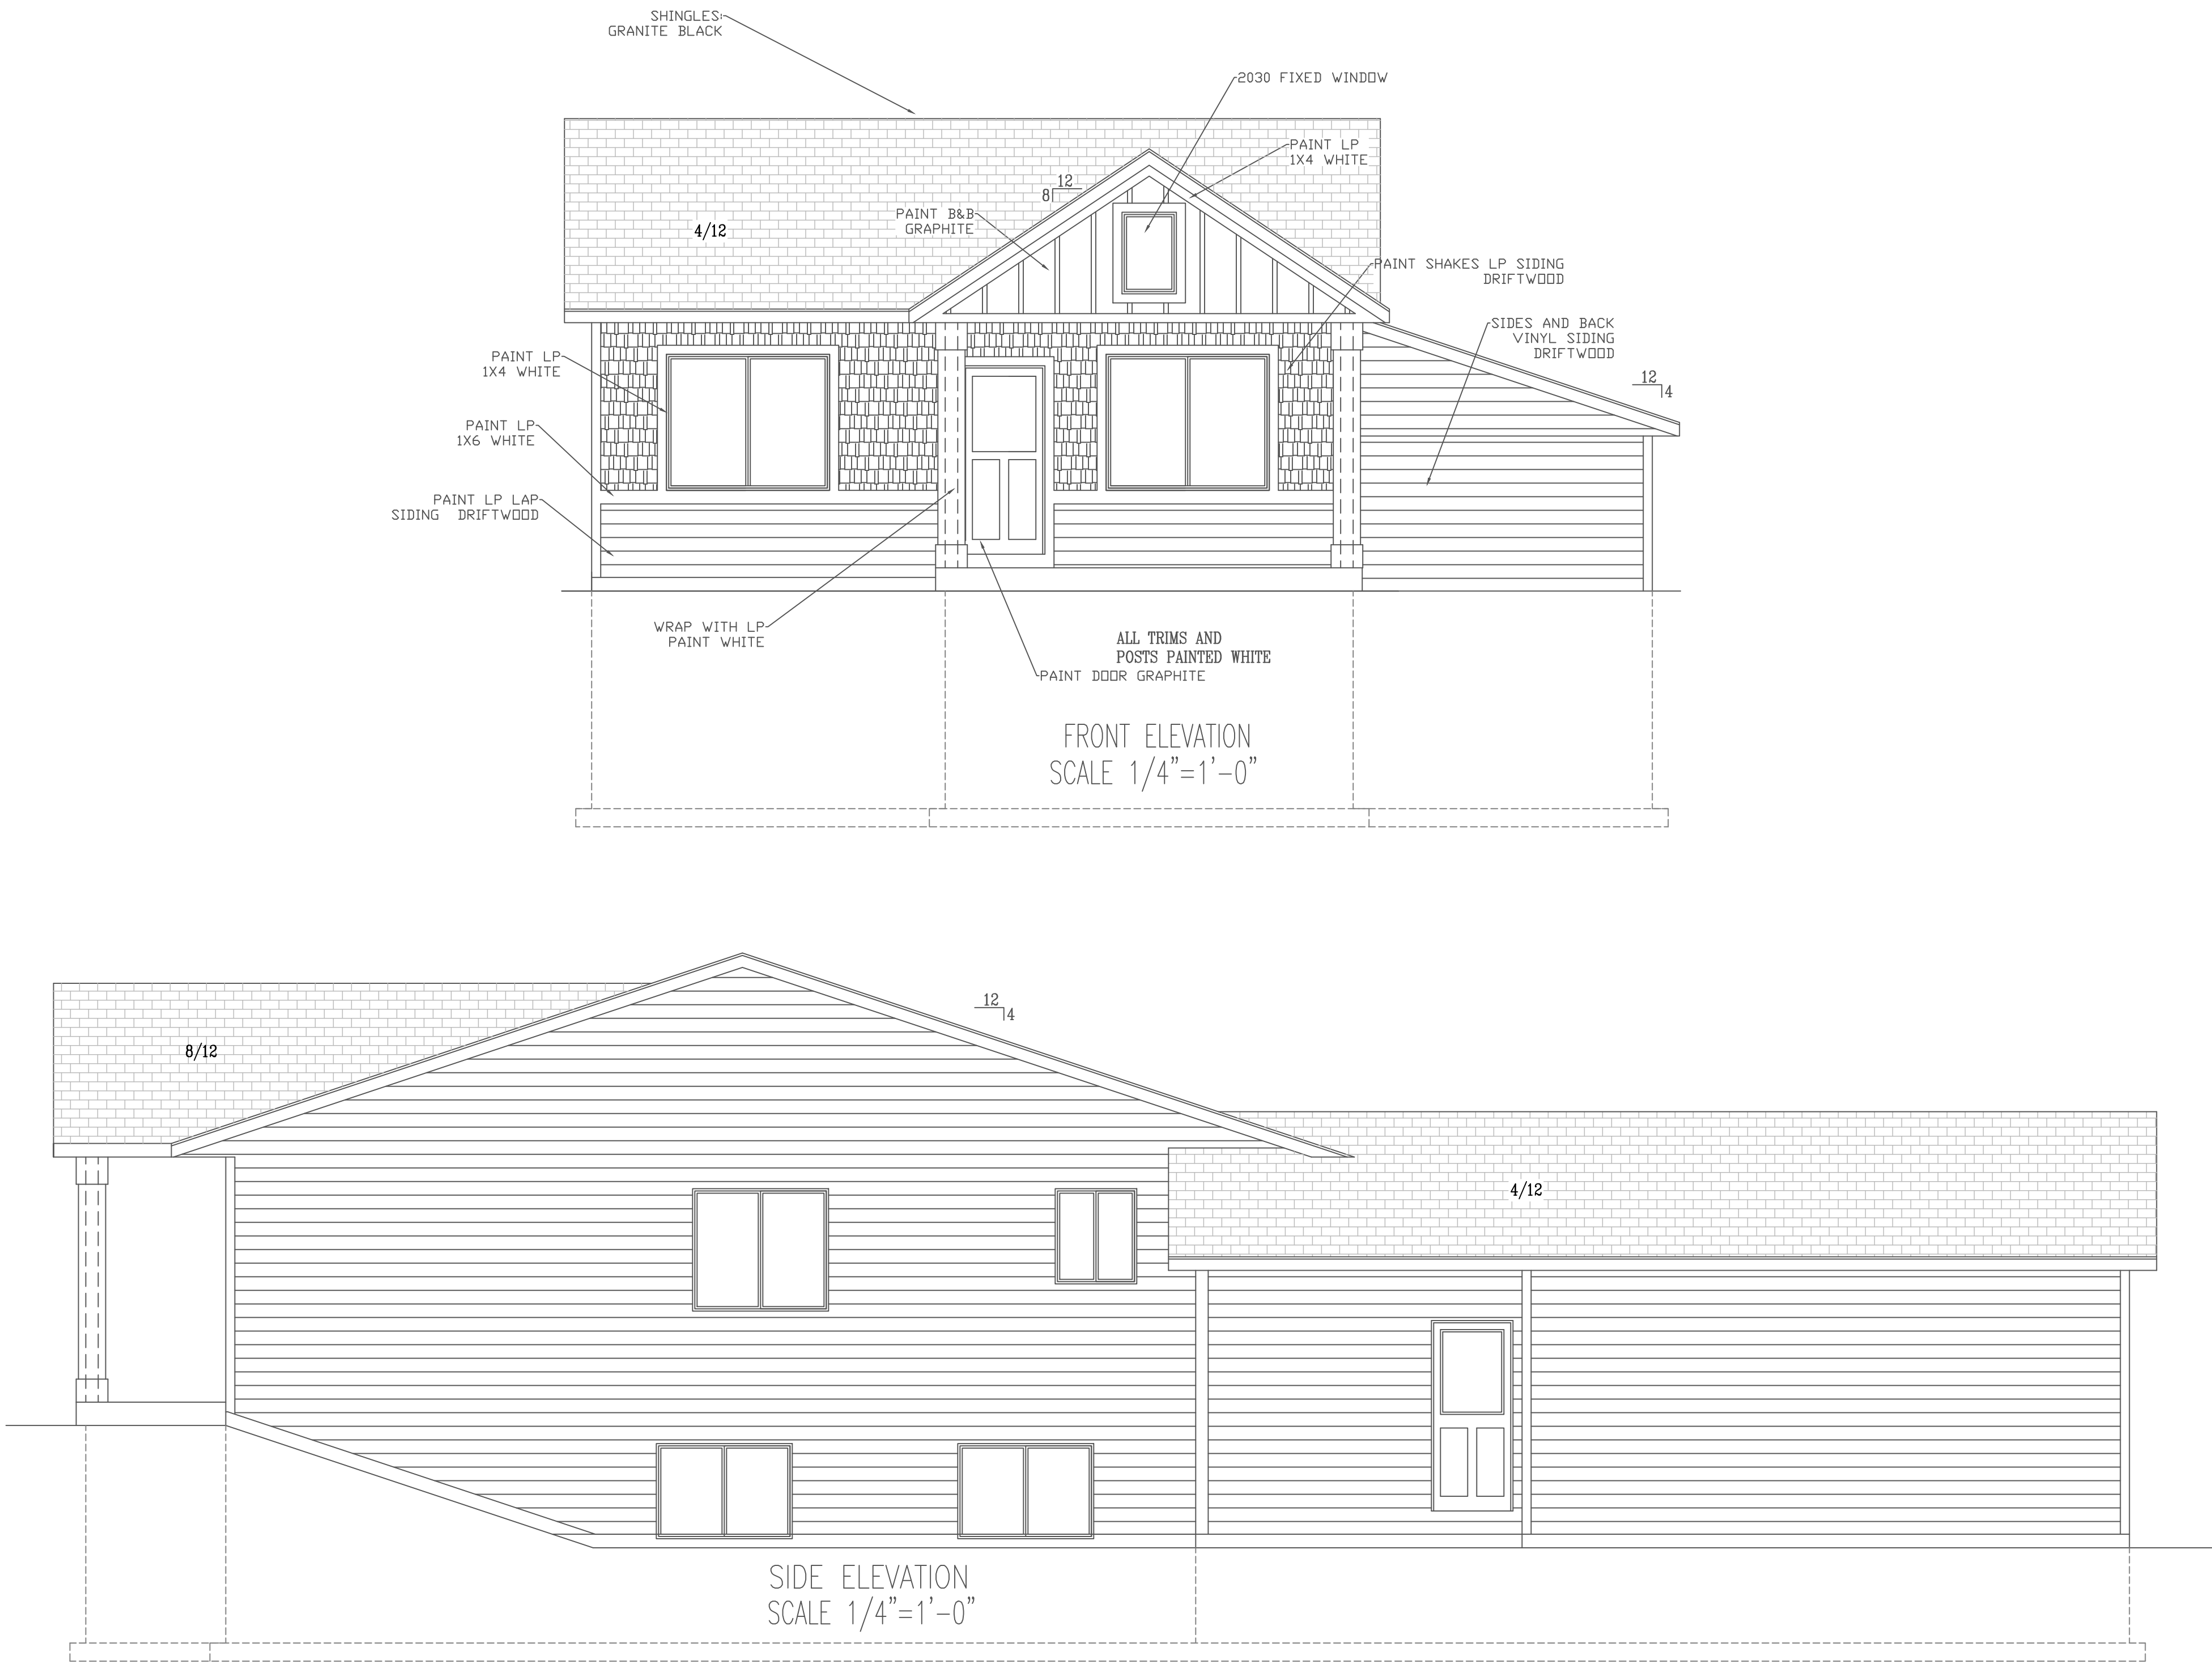

THESE DRAWINGS HAVE BEEN PREPARED USING INFORMATION PROVIDED BY THE CUSTOMER/CONTRACTOR WHO IS SOLELY RESPONSIBLE FOR THE ACCURACY OF THE INFORMATION PROVIDED. THE DRAWINGS ARE NOT A SUBSTITUTE FOR PERMITS, ORDINANCES, CODES AND PRACTICES. BEFORE STARTING CONSTRUCTION, THE CUSTOMER SHOULD CONSULT A CONTRACTOR OR ARCHITECT TO DETERMINE IF THE DRAWINGS NEED TO BE CHANGED TO SATISFY: 1.) STATE OR LOCAL BUILDING CODES OR REGULATIONS; 2.) PROJECT'S STRUCTURAL REQUIREMENTS; 3.) EXISTING CONDITIONS SPECIFIC TO PROJECT OR PROJECT SITE. CONSULT LOCAL BUILDING OFFICIALS TO DETERMINE IF A BUILDING PERMIT IS REQUIRED. WE ASSUME NO RESPONSIBILITY FOR CLAIMS OR DAMAGES ARISING FROM ERRORS, OMISSIONS, DEFICIENCIES, IMPROPER CONSTRUCTION, OR DEFECTS OF THE DRAWINGS.

ACKNOWLEDGED BY: CUSTOMER/CONTRACTOR SIGNATURE _____ DATE _____

CONTRACTOR: BIGELOW HOMES

HARVEST VILLAS MODEL 4-12
5343 56TH ST. NW

OWNER:

DRAWN BY: MJP
DATE: 6-30-26
SQ. FT. 1254
JOB NUM.
SCALE: NOTED
SHEET: A01
1/4"=1'0"

BIGELOW HOMES
4057 28TH STREET NW #100
ROCHESTER, MN 55901



THESE DRAWINGS HAVE BEEN PREPARED USING INFORMATION PROVIDED BY THE CUSTOMER/CONTRACTOR WHO IS SOLELY RESPONSIBLE FOR THE ACCURACY OF THE INFORMATION PROVIDED. THESE DRAWINGS ARE NOT A SUBSTITUTE FOR PERMITS, ORDINANCES, CODES AND PRACTICES. BEFORE STARTING CONSTRUCTION, THE CUSTOMER SHOULD CONSULT A CONTRACTOR OR ARCHITECT TO DETERMINE IF THE DRAWINGS NEED TO BE CHANGED TO SATISFY: 1.] STATE OR LOCAL BUILDING CODES OR REGULATIONS; 2.] PROJECT'S STRUCTURAL REQUIREMENTS; 3.] EXISTING CONDITIONS SPECIFIC TO PROJECT OR PROJECT SITE. CONSULT LOCAL BUILDING OFFICIALS TO DETERMINE IF A BUILDING PERMIT IS REQUIRED. WE ASSUME NO RESPONSIBILITY FOR CLAIMS OR DAMAGES ARISING FROM ERRORS, OMISSIONS, DEFICIENCIES, IMPROPER CONSTRUCTION, OR DEFECTS OF THE DRAWINGS.

ACKNOWLEDGED BY: CUSTOMER/CONTRACTOR SIGNATURE _____ DATE _____

CONTRACTOR: BIGELOW HOMES


HARVEST VILLAS MODEL 4-12
5343 56TH ST. NW

OWNER:

DRAWN BY: MJP
DATE: 6-30-26
SQ. FT. 1254
JOB NUM.
SCALE: NOTED
SHEET: A02
1/4"=1'0"

BIGELOW HOMES

4057 28TH STREET NW #100
ROCHESTER, MN 55901

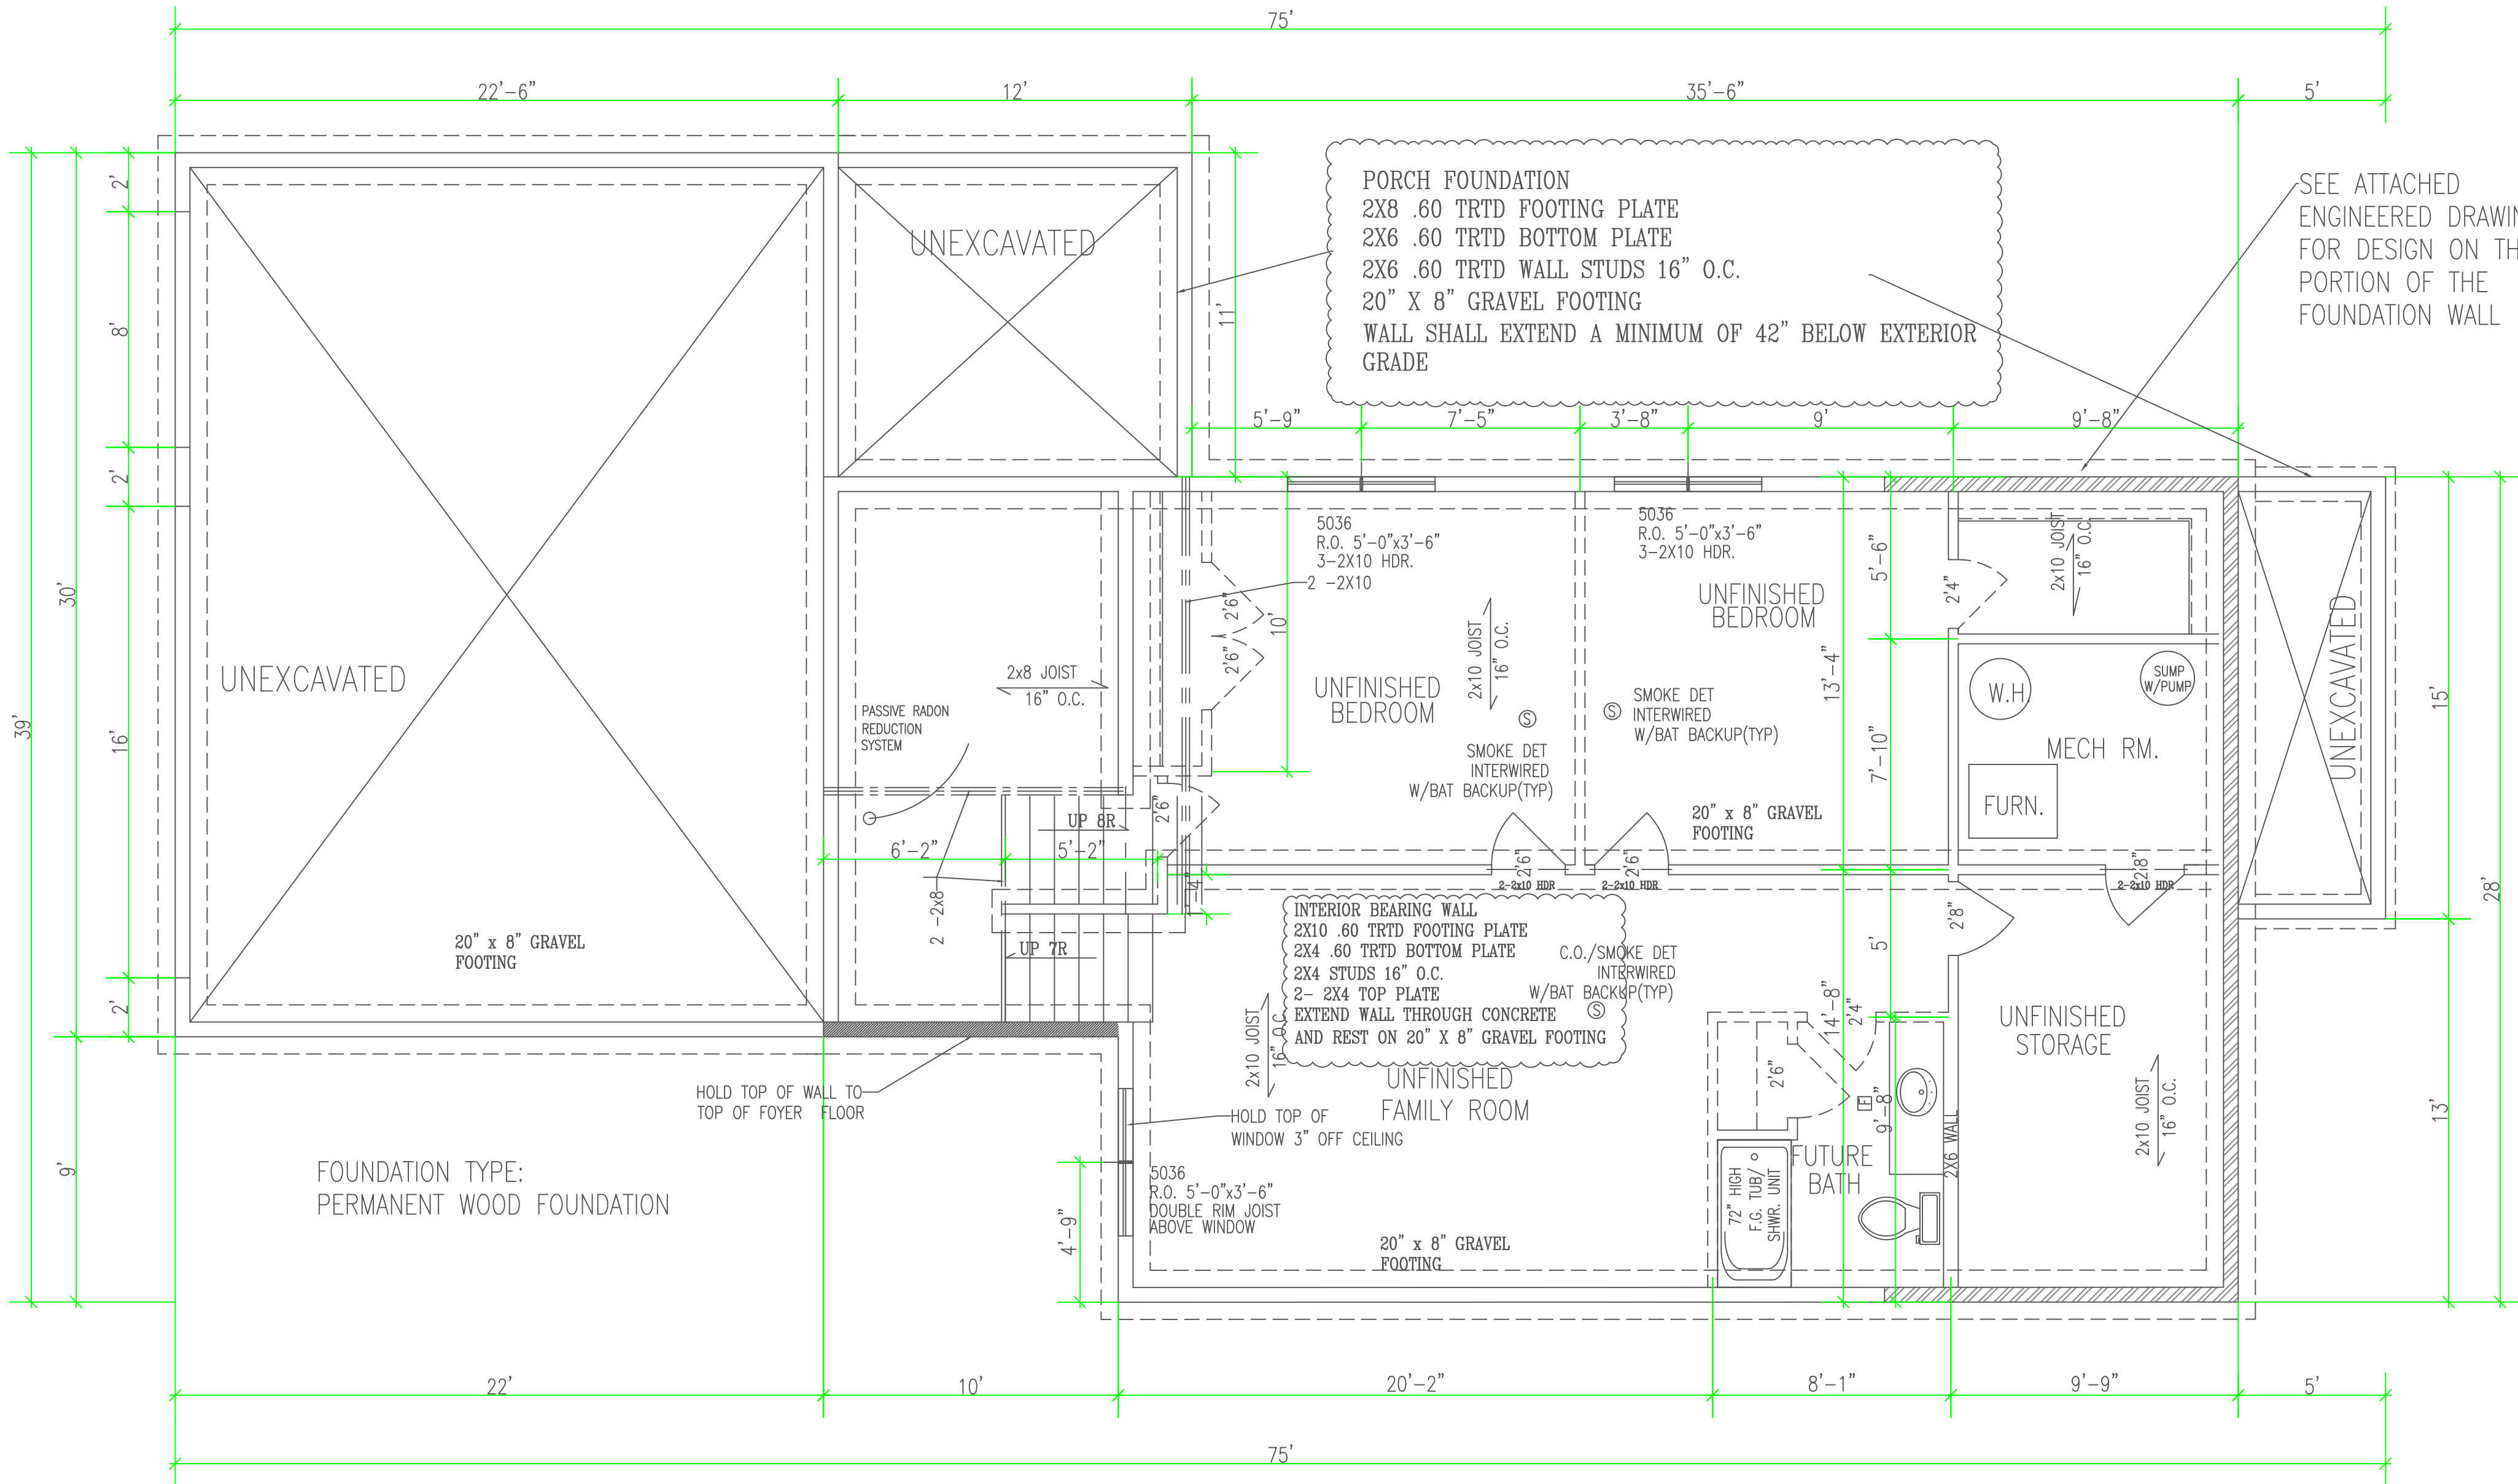


BIGELOW HOMES
4057 28TH STREET NW #100
ROCHESTER, MN 55901

THESE DRAWINGS HAVE BEEN PREPARED USING INFORMATION PROVIDED BY THE CUSTOMER/CONTRACTOR WHO IS SOLELY RESPONSIBLE FOR THE ACCURACY OF THE INFORMATION PROVIDED. THE DRAWINGS ARE NOT A SUBSTITUTE FOR PERMIT DRAWINGS PREPARED BY A CONTRACTOR OR ARCHITECT AND MAY NOT MEET NORMAL CONSTRUCTION STANDARDS AND LOCAL CODES AND PRACTICES. BEFORE STARTING CONSTRUCTION, THE CUSTOMER SHOULD CONSULT A CONTRACTOR OR ARCHITECT TO DETERMINE IF THE DRAWINGS NEED TO BE CHANGED TO SATISFY: 1.) STATE OR LOCAL BUILDING CODES OR REGULATIONS; 2.) PROJECT STRUCTURAL REQUIREMENTS; 3.) EXISTING CONDITIONS SPECIFIC TO PROJECT OR PROJECT SITE. CONSULT LOCAL BUILDING OFFICIALS TO DETERMINE IF A BUILDING PERMIT IS REQUIRED. WE ASSUME NO RESPONSIBILITY FOR CLAIMS OR DAMAGES ARISING FROM ERRORS, OMISSIONS, DEFICIENCIES, IMPROPER CONSTRUCTION, OR DEFECTS OF THE DRAWINGS.

ACKNOWLEDGED BY: _____ CUSTOMER/CONTRACTOR SIGNATURE _____ DATE _____


CONTRACTOR: BIGELOW HOMES
HARVEST VILLAS MODEL 4-12
OWNER: 5343 56TH ST. NW

DRAWN BY: MJP
DATE: 7-20-26
SQ. FT. 1254
JOB NUM.
SCALE: NOTED
SHEET: A03
1/4"=1'-0"

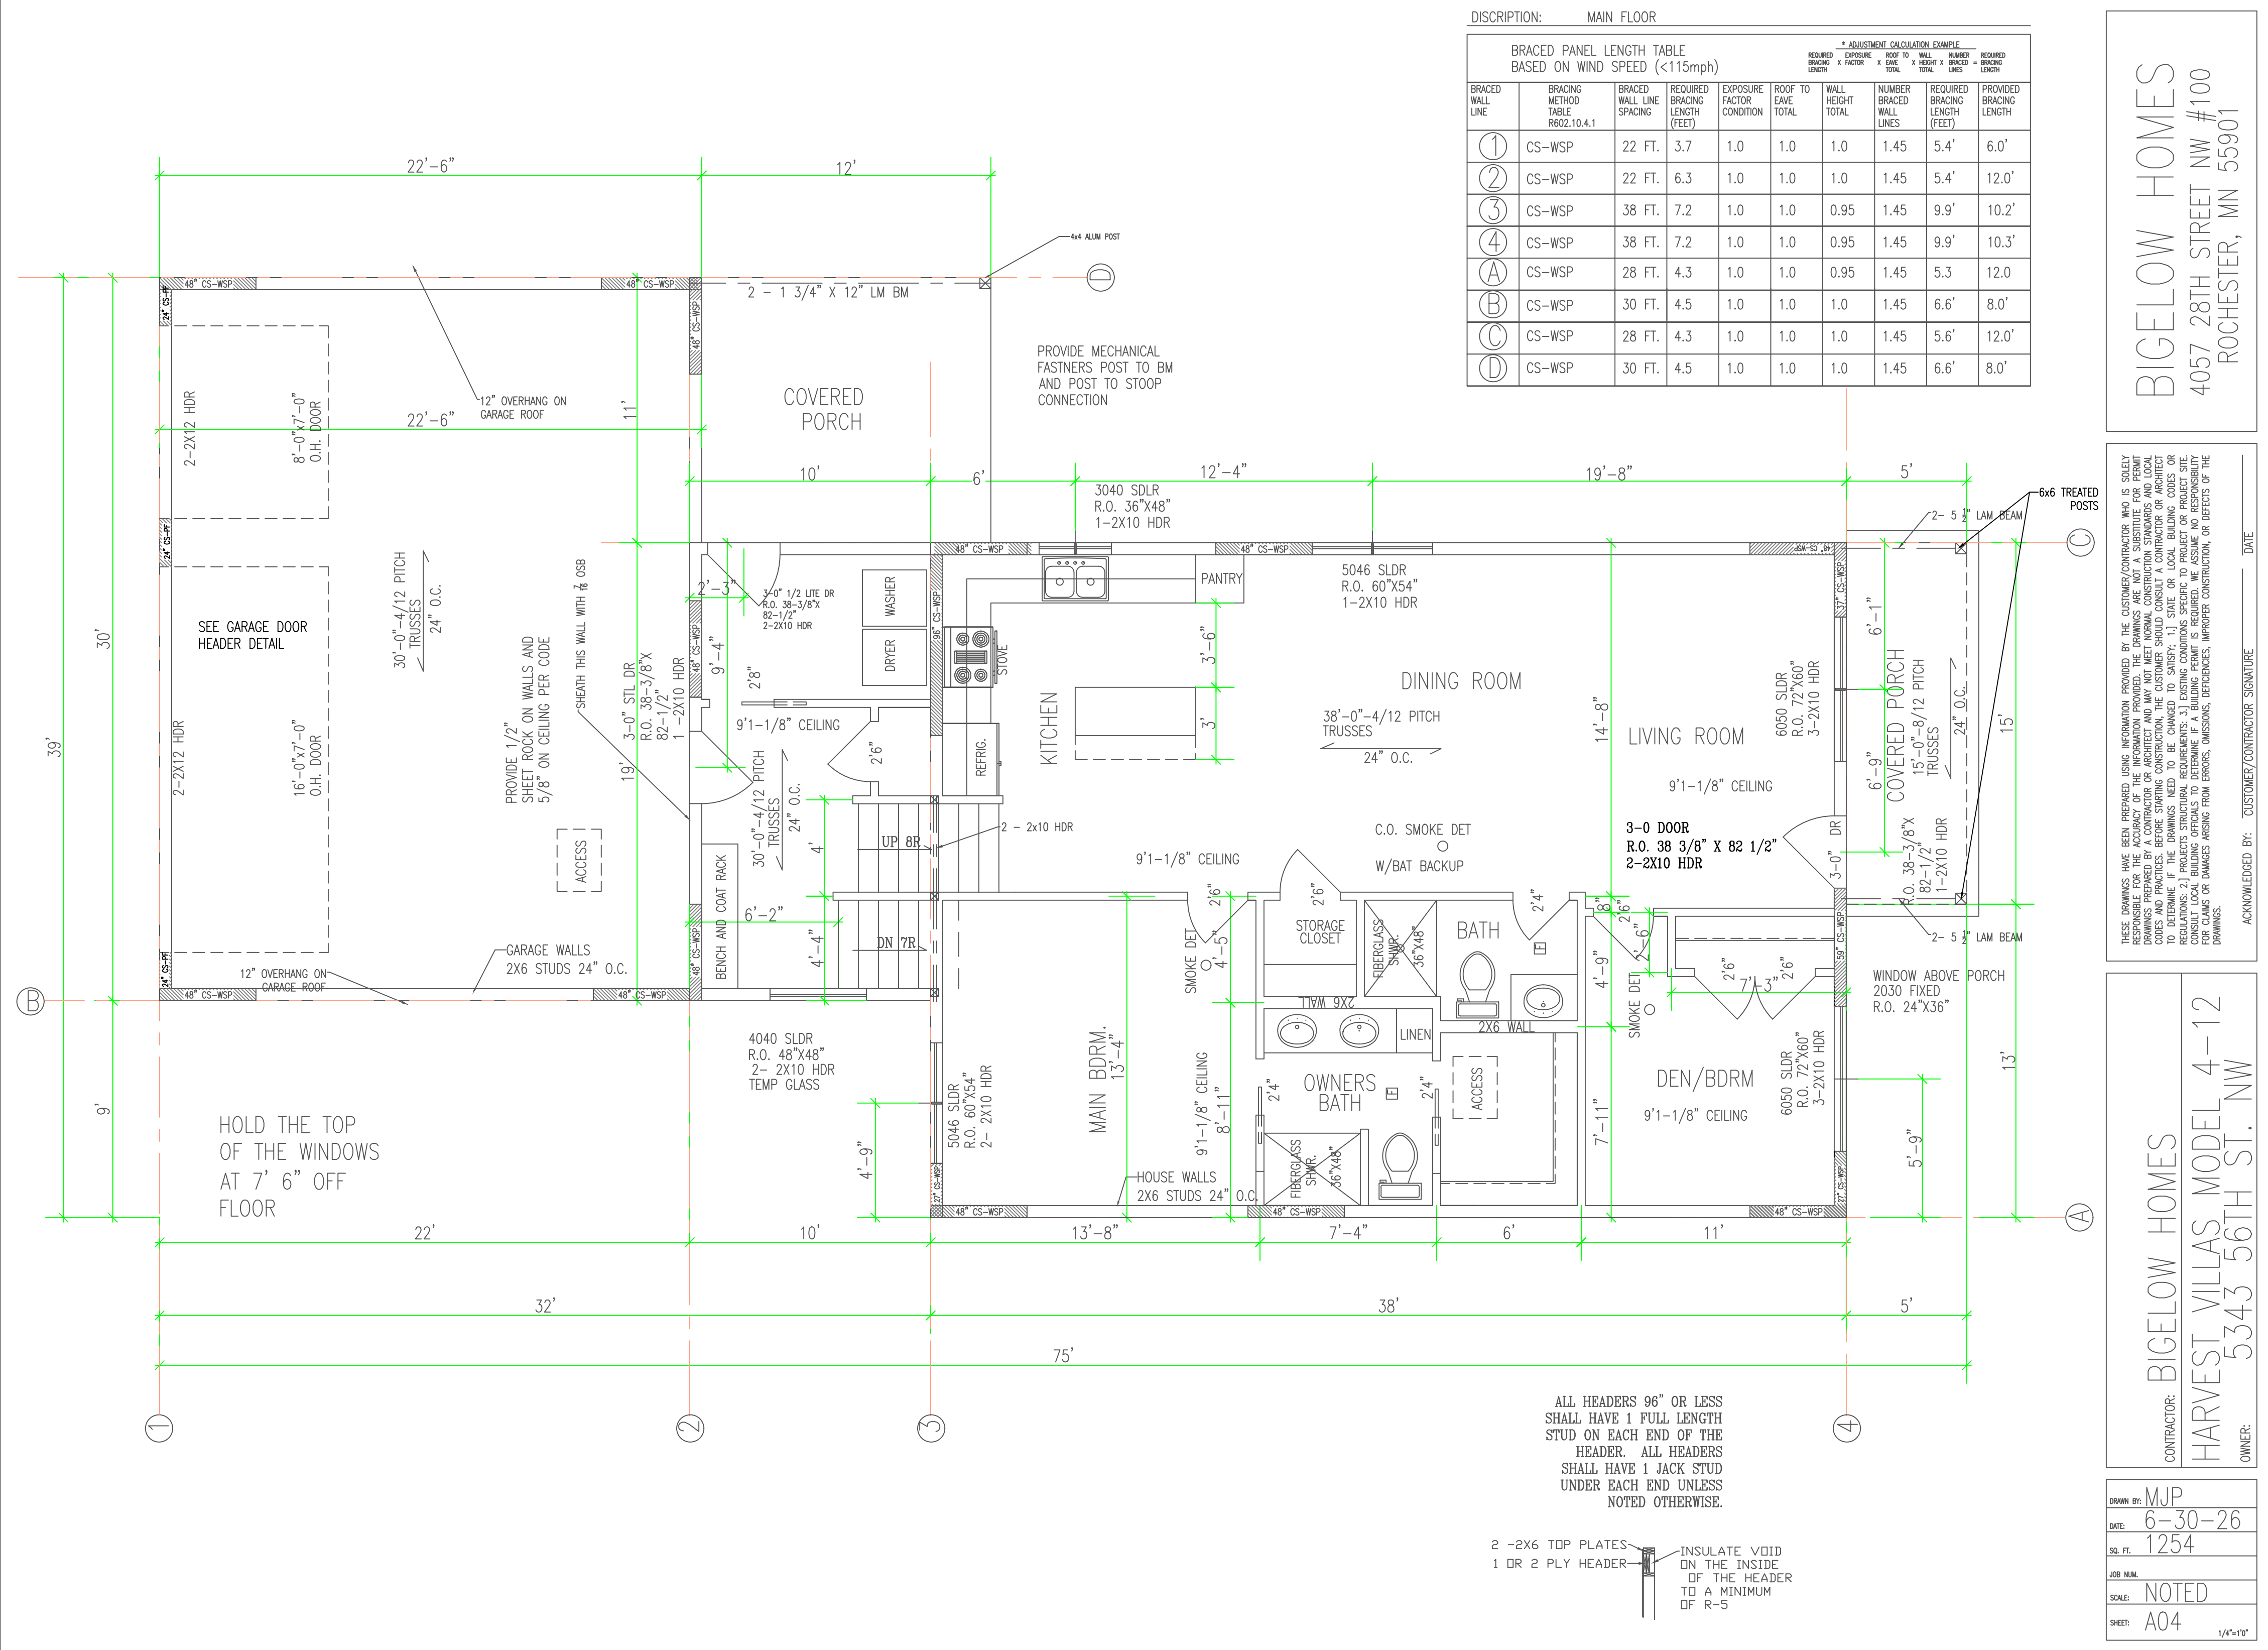

ENERGY TRUSSES 24" O.C. SPECS BY MFG.
1/2" OSB ROOF SHEATHING P.I.I. 32/16
WINTERGUARD APPLIED SHINGLE FASHION
FROM EAVES TO
A POINT 24" INSIDE EXTERIOR WALL.
1 LAYER 15 # FELT ON REMAINING
30 YEAR 3 TAB ASPHALT SHINGLES
PROVIDE STEEL SUPPLEMENTAL UPLIFT
BRACKETS FOR ALL TRUSSES.
PROVIDE CLIPS AS REQUIRED FOR ROOF SHEATHING
PROVIDE METAL IN ALL VALLEYS -CUT SHINGLE VALLEYS

• AT EXTERIOR EDGE OF ATTIC INSULATION. A MINIMUM OF 1" OF AIR SPACE SHALL BE PROVIDED BETWEEN INSUL AND SHEATHING.

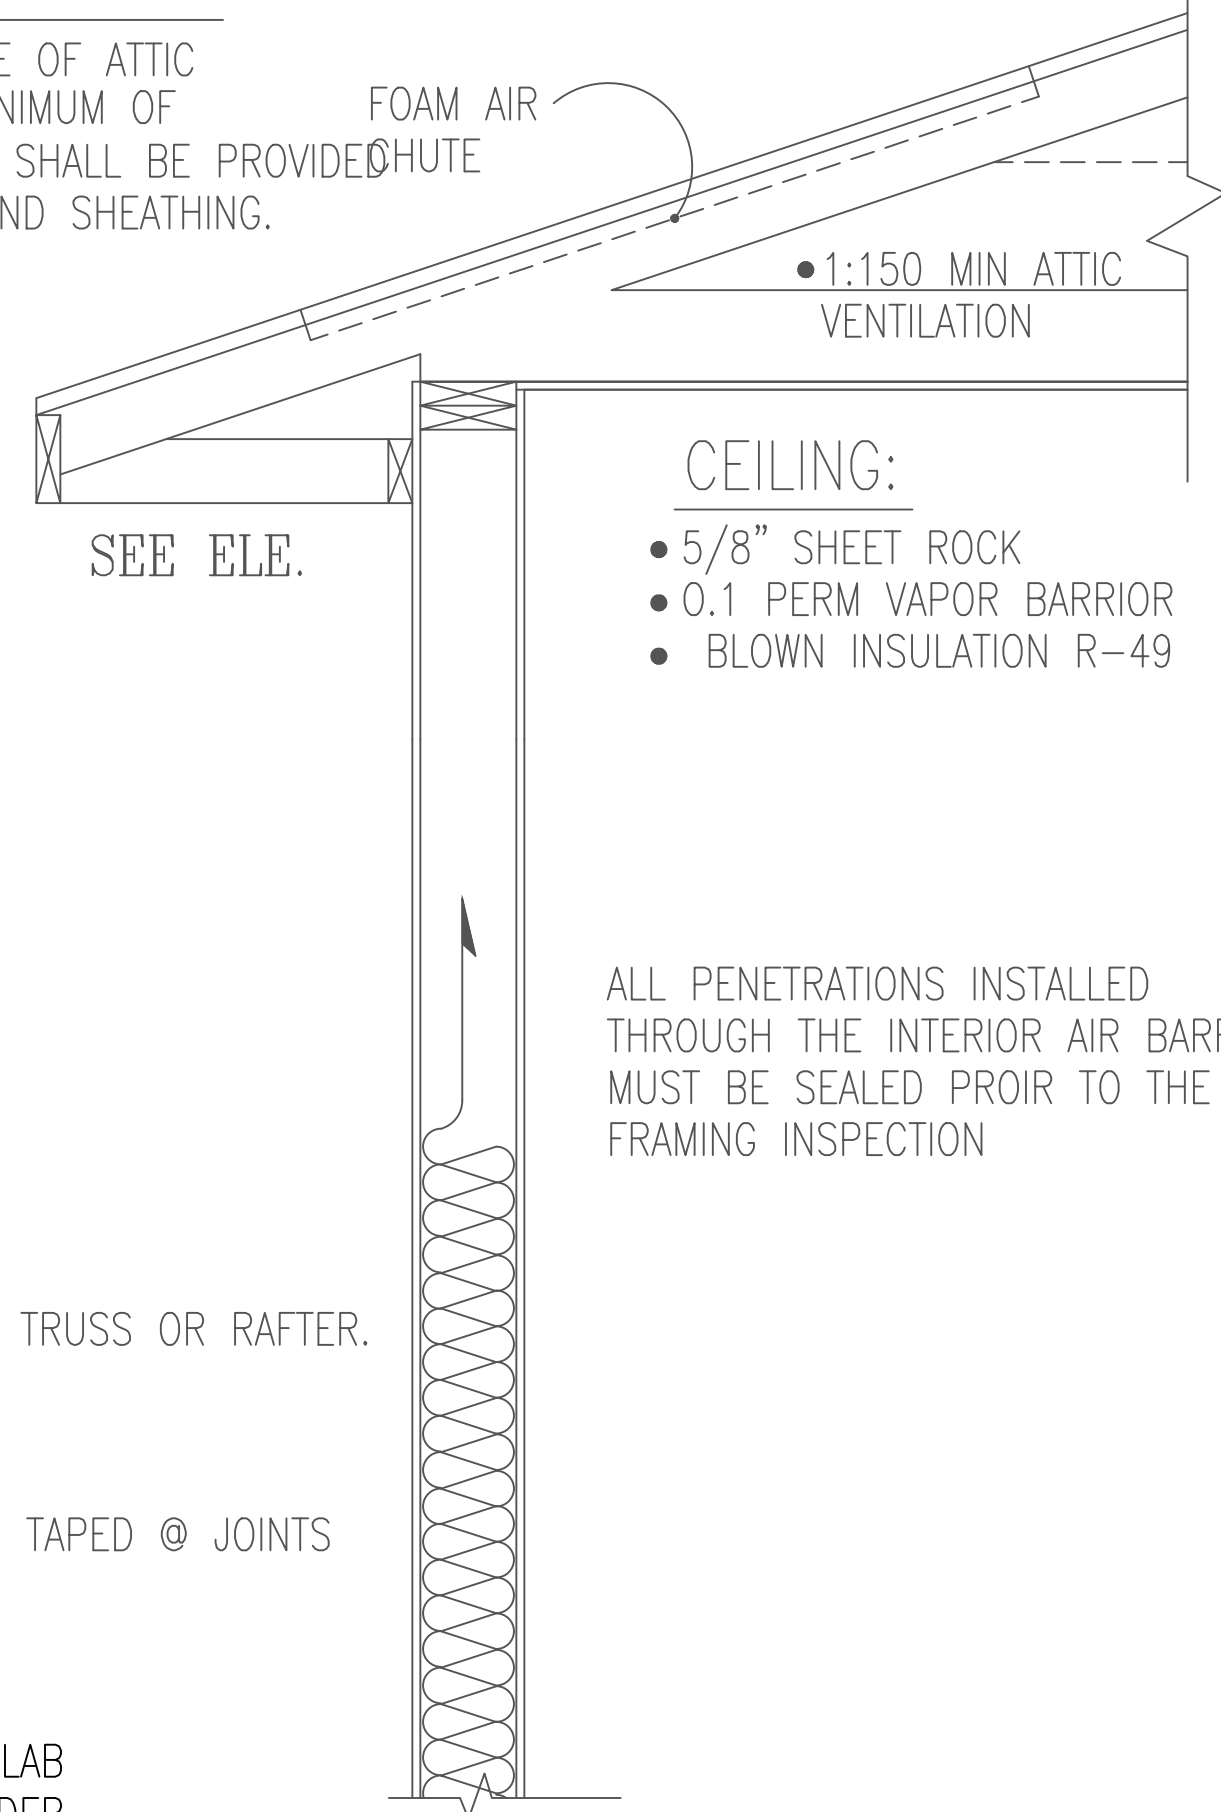

- 5/8" SHEET ROCK
- 0.1 PERM VAPOR BARRIOR
- BLOWN INSULATION R-49

ALL PENETRATIONS INSTALLED
THROUGH THE INTERIOR AIR BARRIER
MUST BE SEALED PRIOR TO THE
FRAMING INSPECTION

2X6 SUBFASCIA
ALUMINUM FASCIA
2X4 LOOKOUTS 24" O.C.
ALUMINUM SOFFIT W/CANT VENT
AIR CHUTES 48" O.C.

SIDING NOTED ON ELEVATIONS
 TYVEK OR TYPAR HOUSE WRAP
 TO UNDERSIDE OF TOP CHORD OF TRUSS OR RAFTER.
 7/16" OSB. WALL SHEATHING
 2X6 STUDS 16" O.C.
 5-1/2" F.F. INSULATION R-20
 6 MIL POLY PERM VAPOR BARRIER TAPED @ JOINTS
 1/2" SHEET ROCK

2X10 .60 TRTD FOOTING PLATE
2X6 .60 TRTD BOTTOM PLATE
2X6 .60 TRTD WALL STUDS 16" O.C.
19/32" .60 TRTD CDX PLY NAILED W/
SAINLESS STEEL NAILS
GLUED AND CAULKED AT SEAMS
6 MIL POLY
20"X8" GRAVEL FOOTING
PLY FACE GRAIN ACROSS STUDS
MAXIMUM BACKFILL HIGHT 86"

FOUNDATION DRAINAGE WILL BE
DISCHARGED BY A SUMP PUMP
INSTALLED IN THE SUMP BASKET

PASSIVE RADON SYSTEM

A MINIMUM 3" DIAMETER PIPE WILL BE INSTALLED THAT ATTACHES TO A "T" FITTING ON THE INSIDE DRAIN TILE AND RUN UP THROUGH THE BUILDING FLOORS AND TERMINATE AT LEAST 12" ABOVE THE SURFACE OF THE ROOF IN A LOCATION AT LEAST 10' AWAY FROM ANY WINDOW OR OTHER OPENING INTO THE CONDITIONED SPACES OF THE BUILDING THAT IS LESS THAN 2' BELOW THE EXHAUST POINT, AND 10' FROM ANY WINDOW OR OTHER OPENING IN ADJOINING OR ADJACENT BUILDINGS. THE PIPE WILL BE INSTALLED TO PROVIDE POSITIVE DRAINAGE TO THE GROUND BENEATH THE SLAB OR SOIL-GAS RETARDER. RADON VENT PIPES SHALL PROVIDE ENOUGH SPACE AROUND THE PIPE FOR FUTURE INSTALLATION OF A FAN SYSTEM. THE SPACE PROVIDED FOR THE INSTALLATION OF A FUTURE FAN SHALL BE MINIMUM OF 24" IN DIAMETER, CENTERED ON THE AXIS OF THE VENT SHAFT, AND SHALL EXTEND FOR A MINIMUM VERTICAL DISTANCE OF 36". AN APPROVED ELECTRICAL OUTLET SHALL BE INSTALLED NEAR THIS SPACE. ALL RADON VENT PIPES SHALL BE IDENTIFIED WITH AT LEAST ONE LABEL ON EACH FLOOR AND IN ACCESSIBLE ATTICS. THE LABEL SHALL READ "RADON REDUCTION SYSTEM". RADON PIPES ROUTED THROUGH UNCONDITIONED SPACE SHALL BE INSULATED WITH R-4 INSUL.

A POROUS LAYER OF GRAVEL SHALL BE PLACED TO A MINIMUM THICKNESS OF 4" UNDER THE BASEMENT FLOOR. A 6-MIL-THICK VAPOR RETARDER WILL BE PLACED OVER THE POROUS LAYER. A SUMP BASKET AND PUMP WILL BE PLACED IN THE DRAINAGE SYSTEM AND SHALL EXTEND NOT LESS THAN 24" BELOW THE BOTTOM OF THE BASEMENT FLOOR. THE SUMP PUMP SHALL DICHARGE TO THE EXTERIOR OF THE HOME.

SUBSLAB
6 MILL SOIL-GAS-RETARDER
ALL JOINTS LAPPED MINIMUM 12"
ALL PENETRATIONS THROUGH SLAB AND SLAB EDGES SEALED
4" LAYER OF CLEAN AGGREGATE BELOW SLAB THAT WILL
PASS THROUGH A 2" SIEVE AND BE RETAINED BY 1/4"
SIEVE



THESE DRAWINGS HAVE BEEN PREPARED USING INFORMATION PROVIDED BY THE CUSTOMER/CONTRACTOR WHO IS SOLELY RESPONSIBLE FOR THE ACCURACY OF THE INFORMATION PROVIDED. THE DRAWINGS ARE NOT A SUBSTITUTE FOR PERMIT APPLICATIONS OR PERMITS REQUIRED TO CONSTRUCT THE PROJECT. ANY CHANGES TO THE DRAWINGS MUST BE MADE IN WRITING AND SIGNED BY THE ARCHITECT BEFORE STARTING CONSTRUCTION. THE CUSTOMER SHOULD CONSULT WITH THE ARCHITECT OR ARCHITECT FIRM TO DETERMINE IF THE DRAWINGS NEED TO BE CHANGED TO SATISFY A STATE OR LOCAL BUILDING CODE OR REGULATION. 2.1 PROJECT STRUCTURAL REQUIREMENTS. 3.1 EXISTING CONDITIONS SPECIFIC TO PROJECT OR PROJECT SITE. CONSULT WITH BUILDING OFFICIALS TO DETERMINE IF A BUILDING PERMIT IS REQUIRED. WE ASSUME NO RESPONSIBILITY FOR OMISSIONS OR DAMAGES ARISING FROM ERRORS, OMISSIONS, DETACHMENTS, IMPROPER CONSTRUCTION, OR DETAILS ON THESE DRAWINGS.

ACKNOWLEDGED BY: CUSTOMER/CONTRACTOR SIGNATURE _____ DATE _____

CONTRACTOR: BIGELOW HOMES


HARVEST VILLAS MODEL 4-12
5343 56TH ST. NW

TRAIN BY:	MJP
DATE:	6-30-26
Q. FT.	1254
SCALE:	NOTED
SHEET:	A06
BIGELOW HOMES	

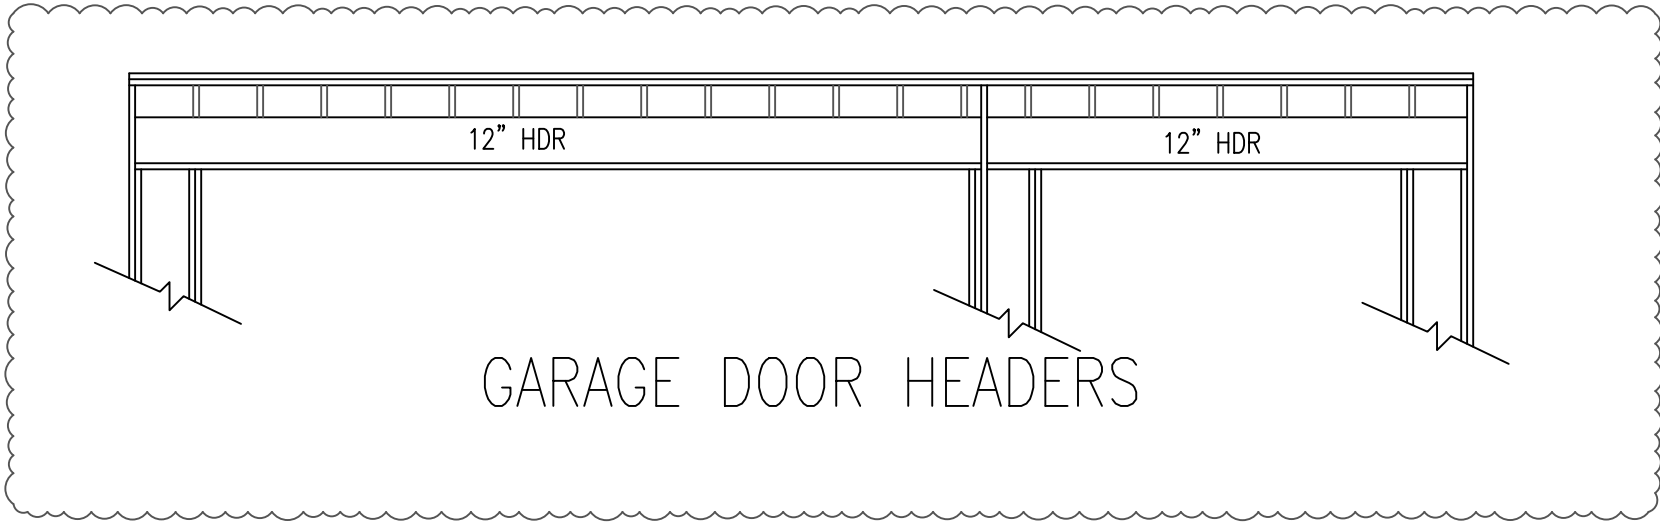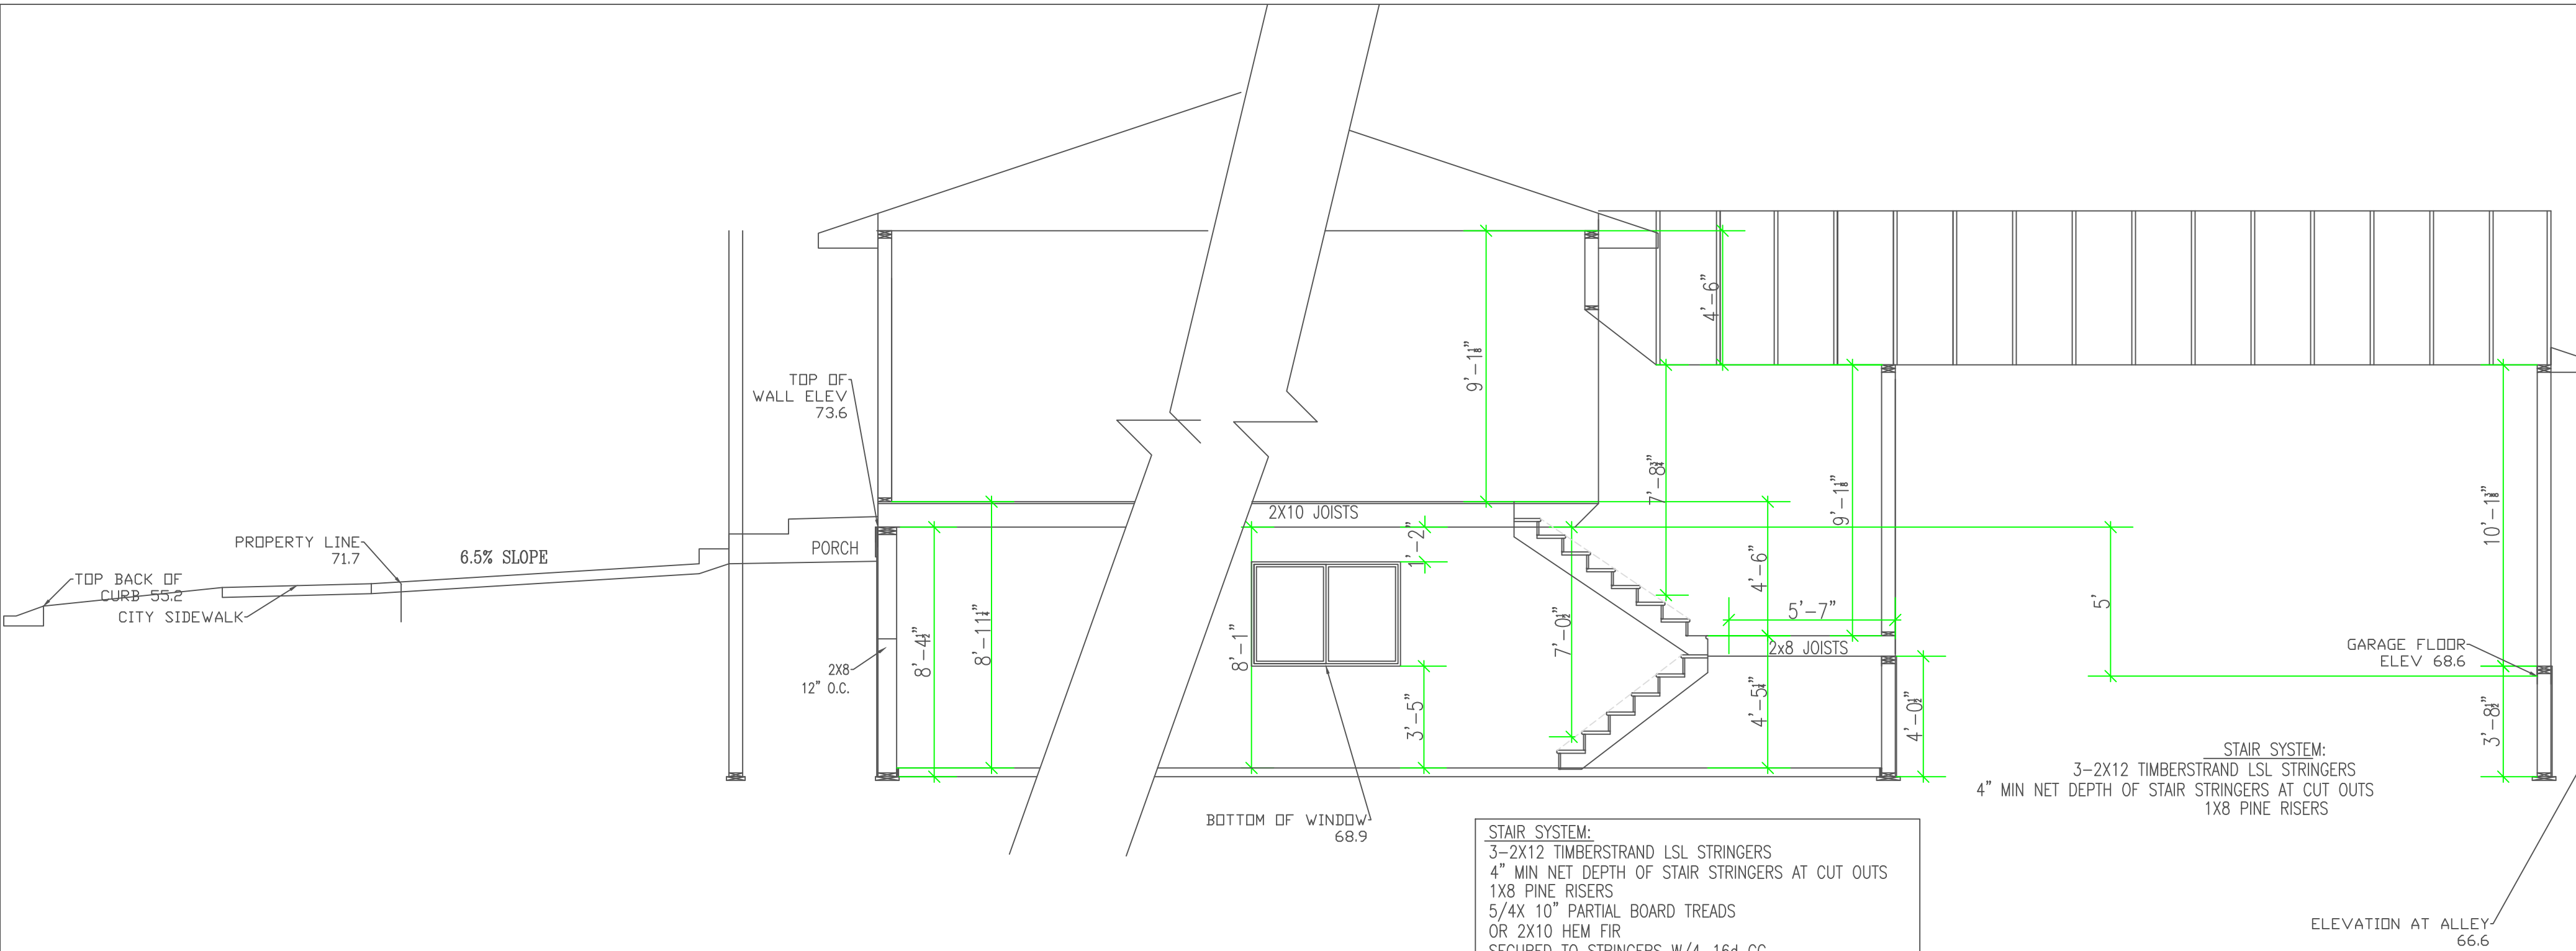

GARAGE DOOR HEADERS

STAIR SYSTEM:
3-2X12 TIMBERSTRAND LSL STRINGERS
4" MIN NET DEPTH OF STAIR STRINGERS AT CUT OUTS
1X8 PINE RISERS
5/4X 10" PARTIAL BOARD TREADS
OR 2X10 HEM FIR
SECURED TO STRINGERS W/4-16d CC
NAILS PER STRINGER.
PROVIDE HANDRAIL 34"-38" HIGH
36" HIGH GUARDRAIL W/4 3/8" MAX OPENINGS.
7 3/4" MAX RISE, 10" MIN RUN
NOSING OF NOT LESS THAN 3/4" OR MORE THAN 1 1/4"
5/8" SHEET ROCK WALLS AND SOFFIT OF ENCLOSED
AND UNUSABLE UNDERSTAIRS.
6"-8" MIN HEADROOM.
PROVIDE HANDRAIL AT A HEIGHT OF 34" - 38"
HANDRAIL SHALL BE CONTINUOUS THE FULL
LENGTH AND RETURN TO THE WALL AT TOP AND
BOTTOM STAIR NOSING

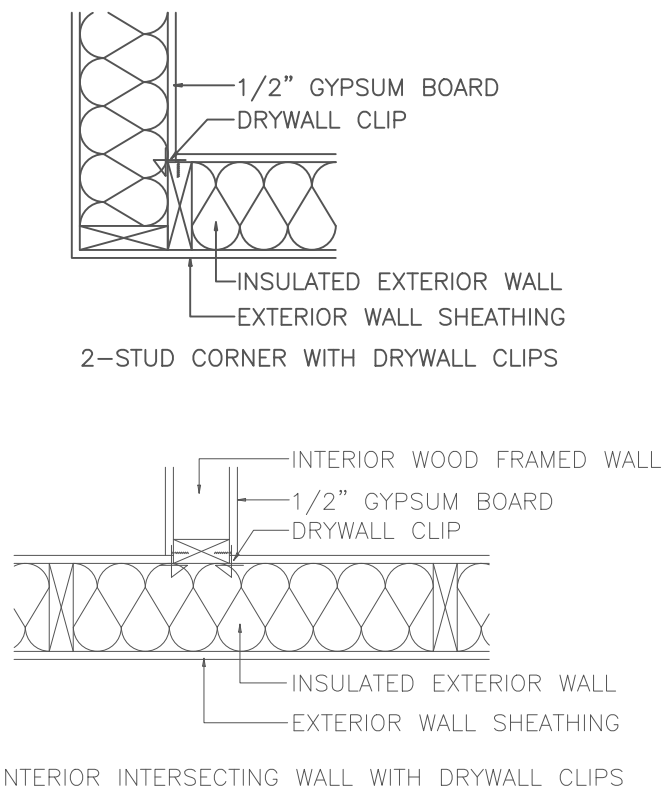

INTERIOR INTERSECTING WALL WITH DRYWALL CLIPS

WALL BRACING NOTES: CS-WSP

1. ALL WALLS SHALL BE CONTINUOUSLY SHEATHED WITH WOOD STRUCTURAL PANELS
2. CS-WSP ON PLANS INDICATE AREAS OF BRACED PANELS
3. BRACED PANELS SHALL BE CONSTRUCTED WITH 16" O.C. STUDS. TOP PLATE FASTENED TO SOLID FRAMING WITH 8d NAILS 6" O.C. BOTTOM PLATES FASTENED TO SOLID FRAMING W/ 3-16d NAILS 16"O.C. 7/16" OSB SHEATHING (24/16 INDEX) FASTENED W/ 8d COMMON NAILS 6"O.C. ON EDGES AND 12" O.C. IN FIELD. SOLID BLOCKING BETWEEN TRUSSES WITH HEEL GREATER THAN 9-1/4" TO WITHIN 2" OF ROOF SHEATHING FASTENED WITH MIN 8d NAILS 6" O.C. ALONG LENGTH OF PANEL
4. ANY OTHER TYPE OF BRACING METHOD SHALL BE INDICATED ON PLAN AND SEPARATE DETAIL WILL BE PROVIDED.

ALL HEADERS 96" OR LESS SHALL HAVE 1 FULL LENGTH STUD ON EACH END OF THE HEADER. ALL HEADERS SHALL HAVE 1 JACK STUD UNDER EACH END UNLESS NOTED OTHERWISE.

BIGELOW HOMES
4057 28TH STREET NW #100
ROCHESTER, MN 55901

THESE DRAWINGS HAVE BEEN PREPARED USING INFORMATION PROVIDED BY THE CUSTOMER/CONTRACTOR WHO IS SOLELY RESPONSIBLE FOR THE ACCURACY OF THE INFORMATION PROVIDED. THE DRAWINGS ARE NOT A SUBSTITUTE FOR PERMIT DRAWS PREPARED BY A CONTRACTOR OR ARCHITECT AND MAY NOT MEET NORMAL CONSTRUCTION STANDARDS AND LOCAL CODES AND PRACTICES. BEFORE STARTING CONSTRUCTION, THE CUSTOMER SHOULD CONSULT A CONTRACTOR OR ARCHITECT TO DETERMINE IF THE DRAWINGS NEED TO BE CHANGED TO SATISFY: 1.] STATE OR LOCAL BUILDING CODES OR REGULATIONS; 2.] PROJECTS STRUCTURAL REQUIREMENTS; 3.] EXISTING CONDITIONS SPECIFIC TO PROJECT OR PROJECT SITE. CONSULT LOCAL BUILDING OFFICIALS TO DETERMINE IF A BUILDING PERMIT IS REQUIRED. WE ASSUME NO RESPONSIBILITY FOR CLAIMS OR DAMAGES ARISING FROM ERRORS, OMISSIONS, DEFICIENCIES, IMPROPER CONSTRUCTION, OR DEFECTS OF THE DRAWINGS.

ACKNOWLEDGED BY: CUSTOMER/CONTRACTOR SIGNATURE DATE

CONTRACTOR: BIGELOW HOMES
HARVEST VILLAS MODEL 4-12
OWNER: 5343 56TH ST. NW

DRAWN BY: MJP
DATE: 7-20-26
SQ. FT. 1254
JOB NUM.
SCALE: NOTED
SHEET: A05
1/4"=1'0"